

M3~M6



M8~M27

产品特性

- 1.所有零件选用型材制作，强度高。
- 2.CNC加工，保证尺寸精度。
- 3.全铜轴瓦，寿命长。
- 4.螺纹连接部分电镀处理，耐腐蚀。
- 5.主体金属喷漆处理，防锈能力强。


订购码

FK	-	M12	-	125
附件代码	螺纹规格	螺纹牙距		
	M3 : M3	50 : 0.5mm		
	M4 : M4	70 : 0.7mm		
	M5 : M5	80 : 0.8mm		
	M6 : M6	100 : 1.0mm		
	M8 : M8	125 : 1.25mm		
	M10 : M10	150 : 1.5mm		
	M12 : M12	200 : 2.0mm		
	M16 : M16			
	M20 : M20			
	M27 : M27			

技术参数

订购码	FK-M3-50	FK-M4-70	FK-M5-80	FK-M6-100	FK-M8-125	FK-M10-125	FK-M12-125	FK-M16-125	FK-M20-150	FK-M27-200
材质	Q235钢材 steel									
适用缸径	6mm	8(10)mm	16mm	12(16mm)	20mm	25(32mm)	40mm	50(63mm)	80(100mm)	125mm
接口尺寸	M3X0.5	M4X0.7	M5X0.8	M6X1.0	M8X1.25	M10X1.25	M12X1.25	M16X1.5	M20X1.5	M27X2
表面处理	主体金属漆，螺纹部分电镀 zinc surface paint and thread electroplated									
重量 (kg)	0.009	0.009	0.023	0.023	0.08	0.11	0.173	0.505	0.796	1.32

安装尺寸

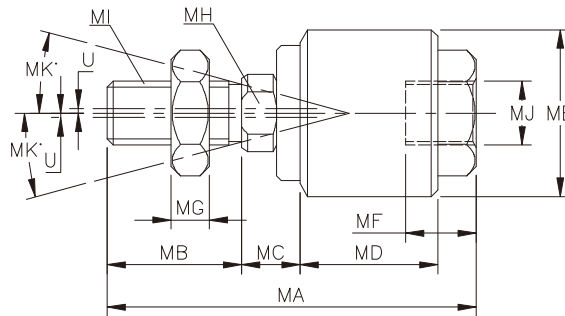

订购码	MA	MB	MC	MD	ME	MF	MG	MH	U	MI	MJ	MK
FK-M3-50	26	10	2.5	10	12	8	3	4	0.5	M3X0.5	M3X0.5	12°
FK-M4-70	26	10	2.5	10	12	8	3	4	0.5	M4X0.7	M4X0.7	12°
FK-M5-80	35	13	3.5	13.5	16	6	5	6	0.5	M5X0.8	M5X0.8	12°
FK-M6-100	35	13	3.5	13.5	16	6	5	6	0.5	M6X1	M6X1	12°
FK-M8-125	51	19	7	18	24	12	5	8	0.5	M8X1.25	M8X1.25	12°
FK-M10-125	58	22	7	21	26	11.5	6	10	0.5	M10X1.25	M10X1.25	12°
FK-M12-125	65	22	8	21	32	11.5	7	12	0.75	M12X1.25	M12X1.25	12°
FK-M16-150	90	27	10	41	45	20	8	17	1	M16X1.5	M16X1.5	12°
FK-M20-150	102	29	13	46	53	24	10	22	2	M20X1.5	M20X1.5	12°
FK-M27-200	122	35	20	48	60	31	12	26	2	M27X2	M27X2	15°

接头与气缸配套表

订购码	适用气缸型号：SE / SI / SC / DNC / DSBC / CP96 /...等														
	缸径	6	8	10	12	16	20	25	32	40	50	63	80	100	125
FK-M3-50	●														
FK-M4-70		●	●												
FK-M5-80					●										
FK-M6-100				●	●										
FK-M8-125						●									
FK-M10-125							●	●							
FK-M12-125									●						
FK-M16-150										●	●				
FK-M20-150												●	●		
FK-M27-200															●